



showcase




- The showcase is to be placed onto the erect structure.
- If you wish to use a showcase, but only have 2 magnets in the hub structure, please contact your supplier.

If you have a showcase with lights it is necessary to allow the lights to cool before replacing into the transport bag.





Max. load of stright showcase: 10 kg
Max. load of side showcase: 5 kg

connectors

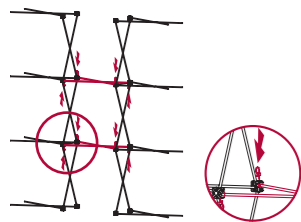



- The connectors are to be placed onto the erect structure.

magnetic bars

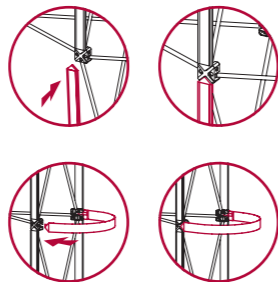

- Unwrap the magnetic bars and attach them to the magnets in the hubs.
- If 180° bars are being used attach these to the side of the structure by inserting them into the hole in the hub.
- The structure is ready for installing the graphics.


Never slide the magnetic bars on top of each other, it would damage the magnetic field!!!

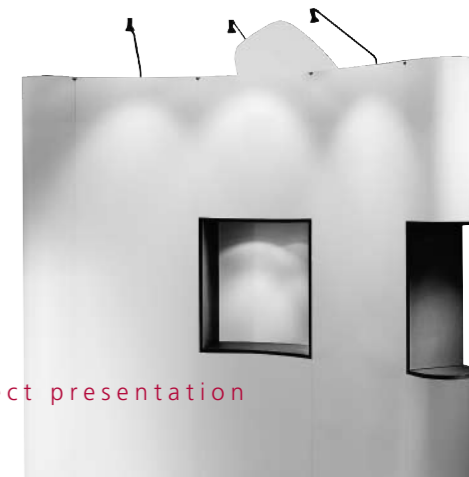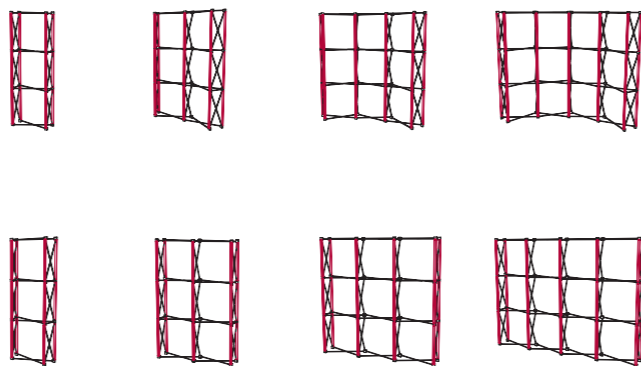

STRUCTURE






- Remove the structure from the packaging.
- Undo the Velcro tape.
- Place the structure on the floor so that the velcro tape is lying on the floor by your feet.
- Partly open out the structure until it is about 0,5 x 0,5 m.



- Hold the structure by the tubes above the hubs marked in the picture.
- Lift the structure, so that the marked hubs are pointing towards you, and expand to its full size.
- Place the erected structure on the floor.




- Press the marked pairs of hubs towards each other until the magnetic lockers connect.



-1-

panels

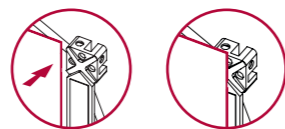

- It is advisable to allow the graphic panels to lie flat for about 30 min before placing onto the structure.




- The graphic panels are attached by hanging the magnetic hangers onto the magnets in the top row of hubs.
- The graphic panels are attached by hanging the „hook“ on the panel onto the heart-shaped panel pegs along the top row of hubs.

- To hang the graphic panels start with either the left or right front panel, NOT the centre. Then continue in sequence. To finish place the two endcap panels.

- To dismantle remove in reverse order. First remove the endcap panels etc.


Graphic panels can be cleaned using water and detergent; laminated panels can also be cleaned with an alcohol-based cleaner.

Always roll up the graphic panels with the print on the outside!

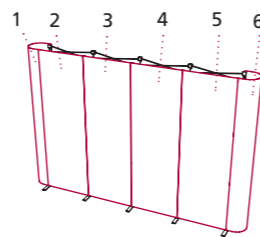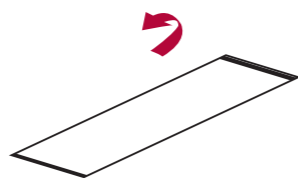

-3-


lights




- The lights should be attached to the structure when it is partly opened to about 0,5 x 0,5 m.

- Start by attaching the lights from the left.

Beware! Do not put hot lights into transport bags!!!

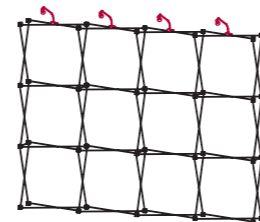


stabilizer feet

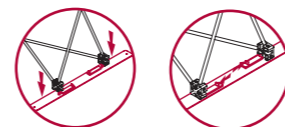

- The feet are to be placed onto the erect structure.

- Insert the pin on the stabilizer foot into the hub.



-5-

packaging



Flight bag for graphic panels.



Flight bag for structure.



Transport bag for magnetic bars.

Notice:
For interior use only!

-6-